

(30) Priority Data:

9802881-4

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7:	A2	(11) International Publication Number:	WO 00/13292
H02K		(43) International Publication Date:	9 March 2000 (09.03.00)

(21) International Application Number:	PCT/SE99/01487
--	----------------

- (22) International Filing Date: 30 August 1999 (30.08.99)
- (71) Applicant (for all designated States expent US). ASEA

28 August 1998 (28.08.98)


- (71) Applicant (for all designated States except US): ASEA BROWN BOVERI AB [SE/SE]; S-721 83 Västerås (SE).
- (72) Inventor; and
 (75) Inventor/Applicant (for US only): LEIJON, Mats [SE/SE];
 Hyvlargatan 5, S-723 35 Västerås (SE).
- (74) Agents: LUNDBLAD VANNESJÖ, Katarina et al.; ABB AB, Patent, S-721 78 Västerås (SE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: A MACHINE AND A METHOD THEREFOR

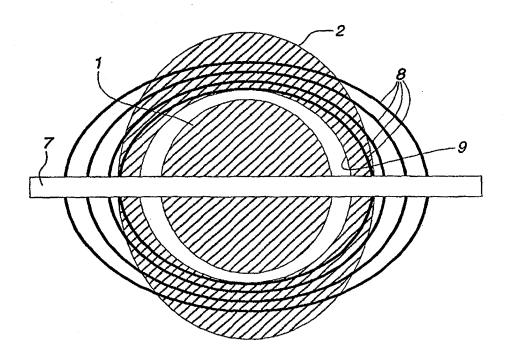

(57) Abstract

A rotating eleletric machine comprising a stator (2) and a rotor (1). The stator includes a core of a magnetizable material and a winding (8). The rotor rotates in relation to the stator with one degree of freedom. The stator comprises a cup—shaped cavity (9) surrounding the rotor. The cavity is limited by a rotational surface which is formed by a line which rotates around an axis and where the line is partly arched.